



Trijicon SRO™

(Specialized Reflex Optic)

The Trijicon SRO™ is specifically designed for pistol use. The wide field of view and clean, crisp dot makes it easy for users to find and track the dot in both target and competitive shooting applications, helping improve shooting accuracy and speed. Every SRO features both manual and automatic LED brightness modes and a 3-year battery life. These features make the SRO a great choice in any application.

1 CLEARLY SEE THE TARGET

- Large, clear lens give the user an unobstructed field of view.
- Parallax free

2 FINDING AND TRACKING THE DOT IS EASY

- The large circular field of view helps you find the dot and center it in the lens when shooting.

3 EASILY MOUNTS TO POPULAR RED-DOT-READY PISTOLS

- The SRO shares the same foot print as the Trijicon RMR®.
- Also compatible with most RMR mounts.
- Does not require a sealing plate.



> QUICK-CHANGE TOP LOADING BATTERY

- Battery changes are easy with no need to dismount the optic.
- Uses common CR 2032 battery. 3 year battery life on setting 4 of 8.*

> EASY-TO-CONTROL SETTINGS

- Button "Lock-out" mode secures the Auto-Brightness setting feature.
- New Button "Lock-in" mode secures the user chosen brightness setting indefinitely.

> Trijicon® DURABILITY

- 7075-T6 forged aluminum housing.
- Waterproof up to 10 ft / 3m.

> COMPATIBLE WITH SUPPRESSOR HEIGHT IRON SIGHTS

*Extreme temperatures (high or low) will affect lithium battery performance.






Trijicon SRO™


(Specialized Reflex Optic)

AVAILABLE RETICLES




1.0 MOA Dot

Best Use:
Long Range and
Bullseye Shooting



2.5 MOA Dot

Best Use:
Target Shooting,
Competition, and Hunting




5.0 MOA Dot

Best Use:
Quick Close Shooting

Reticles not shown to scale. For a full view of reticles, please visit our website at www.Trijicon.com.

Pistol Model	Accepts SRO	Mount Recommended
Glock® MOS	✓	Requires Mount #AC32085
Custom RMR Cut Glock®	✓	None needed
Smith & Wesson® M&P® C.O.R.E.™	✓	None needed
Springfield® 1XD(M)® OSP™	✓	Requires Mount #AC32085
Canik TP9SFX	✓	None needed
Walter® Q5 Match and PPQ Q4	✓	None needed
Custom Cut 1911 that accepts an RMR	✓	None needed
STI Models that take RMR	✓	None needed
Beretta APX	✓	None needed
CZ P10	✓	None needed
Standard 1911	✓	Requires CA428 and some modification by a gunsmith

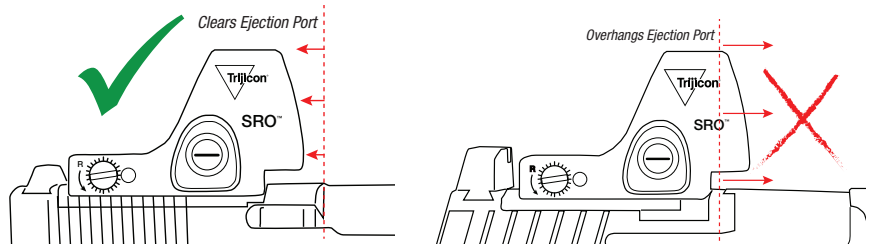

It is not recommended to mount SRO on pistols if the front of the optic overhangs the chamber/breach face as this may cause the pistol to malfunction.

WHY THE UNIQUE SHAPE?

- Designed to keep the RMR footprint and mount compatibility.
- Lengthened to provide space for top-loading battery.
- Circular lens provides maximum viewing area.