Trijicon

Tenmile™ HX

HERE'S TO CARRYING OUT MORE THAN YOU CARRY IN.

When you need to dial in long-range shots in the toughest environments, trust the Trijicon Tenmile™ HX riflescope. Equipped with illuminated precision hunting reticles, outstanding glass, and rugged construction, the Tenmile HX stands up to anything nature throws at you.

Features and Benefits

A Easy-Focus Eyepiece
Diopter accommodates the shooter's individual prescription.

B Re-positionable Magnification Lever
Accommodates different shooting positions and rifle configurations.

C Optimal Flexibility
Generous windage and elevation adjustment for maximum total travel.

D Confident Aiming in Any Light
User-selectable LED brightness settings with an "off" in between each setting to adapt to any environment.

E Quick & Easy Adjustments
Crisp, precise, windage/elevation adjusters require no tools and are designed to prevent accidental shift.

F Purpose-Driven Design
Sleek finish and low-profile controls prevent snagging.

G Increased Adjuster Range
30mm tube offers increased durability and adjuster range.

H Ultra Durable for Ensured Reliability
Ruggedized design engineered to withstand extreme conditions and tested to military standards and protocols.

I Edge-to-Edge Clarity
Fully multi-coated, broadband, anti-reflective glass provides excellent light transmission, true detail, and color with zero distortion.

J "Both-Eyes-Open" Shooting
Illuminated reticles provide a clear aiming point that draws the shooter's eye for fast engagement.

K Pinpoint Aiming in Any Condition
Precise milling and holdover reticles available in first or second focal plane for ensured accuracy.

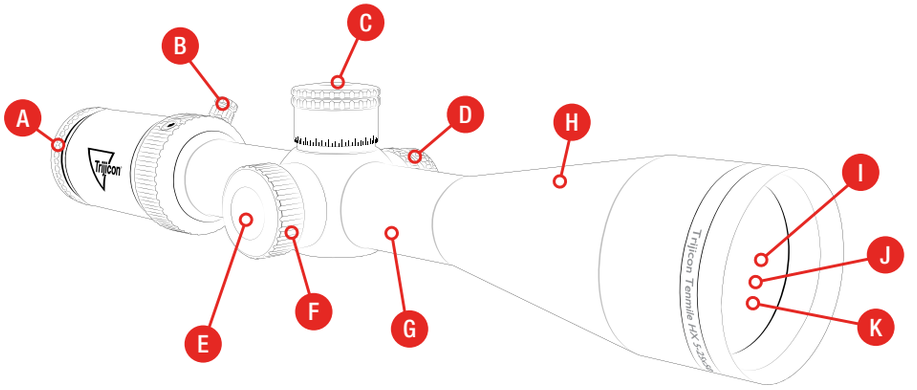

Specifications

	3-18x44 (TMHX1844 Series)	3-18x50 (TMHX1850 Series)
Eye Relief	3.4 – 3.9 in. 87 – 100mm	3.4 – 4.0 in. 87 – 101mm
Exit Pupil	0.45 – 0.09 in. 11.4 – 2.4mm	0.45 – 0.11 in. 11.4 – 2.8mm
Field of View (@ 100 yd.) (@ 100m) (degrees)	35.3 – 5.9 ft. 11.8 – 2.0m 6.73° – 1.12°	34.7 – 5.8 ft. 11.6 – 1.9m 6.62° – 1.11°
Focal Plane	First	Second
Adjuster Style	Exposed / Capped	Capped
Adjustments	1/4 MOA Per Click	0.1 MRAD Per Click
Adjustment Range Total Travel	60 MOA	17 MRAD
Parallax Adjustment Range	15 yds. to Infinity	15 yds. to Infinity
Finish	Satin	Satin
Dimensions (L x W x H)	15.02 x 3.26 x 2.4 in.	14.87 x 3.26 x 2.59 in.
Weight	24.4 oz.	25.7 oz.
Illumination Source	LED Powered by CR2032 Lithium Battery	LED Powered by CR2032 Lithium Battery
Tube Diameter	30mm	30mm

	5-25x50 (TMHX2550 Series)	6-24x50 (TMHX2450 Series)
Eye Relief	2.9 – 3.9 in. 73 – 99mm	3.1 – 3.8 in. 79 – 96mm
Exit Pupil	0.39 – 0.08 in. 10.0 – 2.0mm	0.29 – 0.08 in. 7.5 – 2.1mm
Field of View (@ 100 yd.) (@ 100m) (degrees)	20.1 – 4.0 ft. 6.7 – 1.3m 3.83° – 0.77°	19.0 – 4.7 ft. 6.3 – 1.6m 3.62° – 0.91°
Focal Plane	Second	Second
Adjuster Style	Exposed / Capped	Capped
Adjustments	1/4 MOA Per Click	1/4 MOA Per Click
Adjustment Range Total Travel	50 MOA Elevation 40 MOA Windage	70 MOA
Parallax Adjustment Range	25 yds. to Infinity	10 yds. to Infinity
Finish	Satin	Satin
Dimensions (L x W x H)	13.5 x 3.3 x 2.8 in.	14.45 x 3.05 x 2.14 in.
Weight	25.6 oz.	24.9 oz.
Illumination Source	LED Powered by CR2032 Lithium Battery	LED Powered by CR2032 Lithium Battery
Tube Diameter	30mm	30mm

3-18x44



MOA
Precision Tree

First Focal Plane (FFP) MOA Precision Tree, 30mm Tube, Exposed Elevation Adjuster with Return-to-Zero Feature

Satin Black: TMHX1844-C-3000001

3-18x50



MRAD
Center Dot

MRAD Center Dot, 30mm Tube, Exposed Elevation Adjuster with Return-to-Zero Feature

Satin Black: TMHX1850-C-3000009

5-25x50

MOA
Center Dot

MOA Center Dot, 30mm Tube, Exposed Elevation Adjuster with Return-to-Zero Feature

Satin Black: TMHX2550-C-3000010

6-24x50

LED Dot
MOA Ranging

LED Dot MOA Ranging LED Dot, 30mm Tube, Low Capped Adjusters

Satin Black: TMHX2450-C-3000003 TMHX2450-C-3000004