Trijicon®
Brilliant Aiming Solutions™

Trijicon Credo® HX



The Trijicon Credo® HX was designed with one purpose in mind: brag-worthy hunts. To help you do so, with style, it offers rapid target acquisition from dawn to dusk, pinpoint accuracy, and tough-as-nails construction that can more than handle the hazards of a hunt.

1. Red and green illuminated reticles for any-light hunting
2. Proven reticle choices for more discerning hunters
3. Durable construction that can take the beating nature hands out
4. Exposed elevation adjusters with zero stop for easy zeroing
5. Outstanding quality lenses for an incredibly clear sight picture

The Science of Brilliant®

At Trijicon, we are bound by a commitment to industry-leading research, design, and testing to seek innovative aiming solutions that constantly redefine "brilliant." That's why every Trijicon riflescope design is tested to the procedures below.



- **Alaska-to-Africa Temperature Tested**
  To ensure each family of riflescopes is ready for whatever our users put them through, we perform an "Alaska-to-Africa" temperature shock test with temps from -20°F to 140°F.
- **Immersion Tested**
  All models are immersion tested, and every riflescope is dry-nitrogen filled to eliminate internal fogging.
- **Solid Zero Tested**
  Our riflescopes are designed to hold their zero giving you the precision you need. Every model is subjected to 5,000 consecutive rounds, confirming no reticle shift has occurred.
- **Shock & Vibration Tested**
  All riflescope models are tested to withstand recoil and vibrational stresses without malfunction, so it can take a beating before, during, and after use.
- **Drop Tested**
  Because we don't believe every drop should be followed by a warranty claim, we drop test each riflescope design to check for durability.

To learn more about The Science of Brilliant and Trijicon products, visit Trijicon.com/Science.

Features and Benefits

A Easy-Focus Eyepiece
Diopter accommodates the shooter's individual prescription.

B Repositionable Magnification Lever
Accommodates different shooting positions and rifle configurations.

C Purpose-Driven Design
Sleek finish and low-profile controls prevent snagging.

D Confident Aiming in Any Light
User-selectable LED brightness settings with an "off" in between each setting to adapt to any environment.

E Quick & Easy Adjustments
Crisp, precise, windage / elevation adjusters require no tools and are designed to prevent accidental shift.


F Ultra Durable for Ensured Reliability
Ruggedized design engineered to withstand extreme conditions and tested to military standards and protocols.

G Edge-to-Edge Clarity
Fully multi-coated broadband anti-reflective glass provides excellent light transmission, true detail and color with zero distortion.

H Both-Eyes-Open Shooting
Illuminated reticles provide a clear aiming point that draws the shooter's eye for fast engagement.

I Quick Target Acquisition
Proven reticle designs for the most discerning hunters, ensuring fast ranging and holdovers.

J Fast Scanning, Detection and Tracking
Extra-wide field of view for maximum situational awareness.

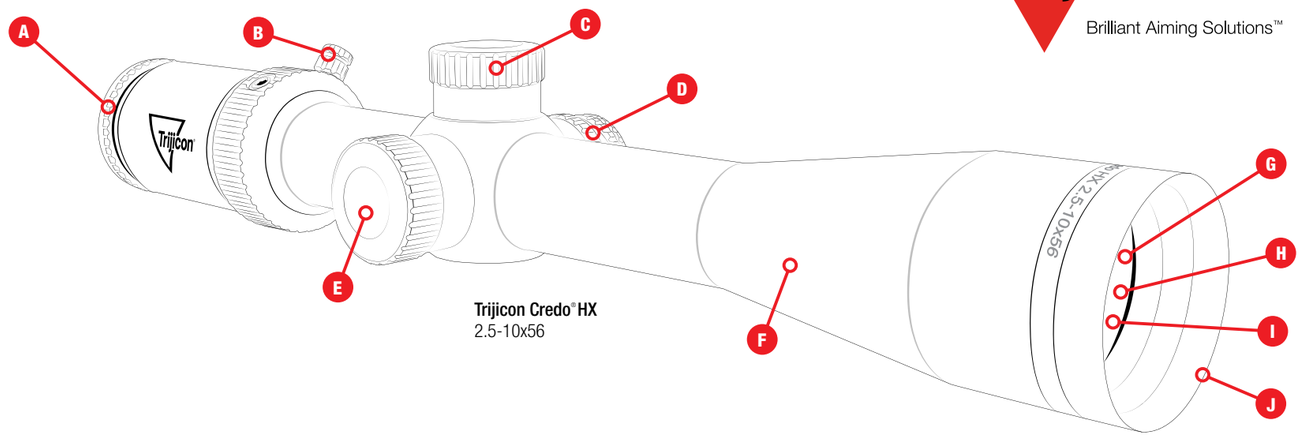


Trijicon Credo® HX
2.5-10x56

Trijicon®
Brilliant Aiming Solutions™


First Focal Plane (FFP) vs. Second Focal Plane (SFP)

First focal plane (FFP) reticles sit in front of the erector within the scope, and will appear to increase and decrease in size as magnification changes. Reticle subtensions used for ranging and wind holds will remain constant at any magnification.



Low Magnification — High Magnification

Second focal plane (SFP) reticles sit behind the erector, resulting in reticle subtensions that are calibrated to a specific magnification. Unlike FFP reticles, second focal plane reticles appear constant in size regardless of the magnification.



Low Magnification — High Magnification


Specifications

	1-6x24 (CRHX624 Series)	1-8x28 (CRHX828 Series)	1-10x28 (CRHX1028 Series)	2.5-10x56 (CRHX1056 Series)	2.5-15x42 (CRHX1542 Series)	2.5-15x56 (CRHX1556 Series)	4-16x50 (CRHX1650 Series)
Eye Relief	3.5 – 3.9 in. 88 – 100mm	3.0 – 4.0 in 76 – 101mm	3.2 – 3.9 in 81 – 99mm	2.8 – 4.0 in. 72 – 102mm	3.4 – 3.9 in. 85 – 100mm	3.3 – 3.9 in. 85 – 98mm	3.1 – 3.8 in. 78 – 96mm
Exit Pupil	.47 – .16 in. 12 – 4.1mm	.46 – .14 in. 11.7 – 3.5mm	.32 – .11 in 8.1 – 2.8mm	.64 – .21 in. 16.2 – 5.4mm	.42 – .11 in. 10.7 – 2.8mm	.46 – .15 in. 11.6 – 3.7mm	0.33 – 0.12 in. 8.5 – 3.1mm
Field of View **(@ 100 yd.)** **(@ 100m)** **(Degrees)**	113.4 – 18.8 ft. 37.8 – 6.3m 21.4° – 3.58°	105.8 - 13.2 ft. 35.3 - 4.4m 20° – 2.53°	116.6 - 11.7 ft. 38.9 - 3.9m 22° – 22°	38.3 – 10.2 ft. 12.8 – 3.4m 7.3° – 1.94°	41.2 – 6.9 ft. 13.7 – 2.3m 7.86° – 1.31°	43.1 – 7.4 ft. 14.4 – 2.5m 8.22° – 1.42°	28.5 – 7.1 ft. 9.5 – 2.4m 5.43° – 1.36°
Focal Plane	First / Second	First	First	Second	Second	Second	Second
Elevation Adjuster Style	Low Capped	Exposed / Locking	Exposed Zero Stop	Exposed Zero Stop / Low Capped	Exposed Zero Stop	Exposed Zero Stop	Exposed Zero Stop / Low Capped
Adjuster Heights **Top of Tube to Top of Adjuster**	0.721 in.	1.012 in.	0.996 in	0.721 in. (C) 1.106 in. (E)	1.106 in.	1.106 in.	0.721 in. (C) 1.106 in. (E)
Adjustments	1/4 MOA per click	1/4 MOA per click	1/4 MOA per click	1/4 MOA per click	1/4 MOA per click	1/4 MOA per click	1/4 MOA per click
Adjustment Range Total Travel	100 MOA	100 MOA	100 MOA	50 MOA	100 MOA Elevation 80 MOA Windage	60 MOA	70-100 MOA Elevation 70 MOA Windage
Parallax Adjustment Range	N/A	N/A	N/A	N/A	10 yd. to Infinity	10 yd. to Infinity	10 yd. to Infinity
Finish	Satin	Satin	Satin	Satin	Satin	Satin	Satin
Dimensions **(L x W x H)**	10.9 x 2.8 x 2.0 in.	10.8 x 3.2 x 2.6 in.	10.1 x 3.2 x 2.4 in.	13.8 x 2.7 – 2.9 x 2.6 – 2.8 in.	13.9 x 3.3 x 2.6 in.	14.7 x 3.3 x 2.9 in.	14.5 x 3.1 x 2.1 in.
Weight	18.2 – 18.9 oz.	25.7 oz.	21.2 oz.	25.4 oz.	22.9 oz.	27 oz.	24.7 oz.
Illumination Source	LED Powered by (1) CR2032 Battery	LED Powered by (1) CR2032 Battery	LED Powered by (1) CR2032 Battery	LED Powered by (1) CR2032 Battery	LED Powered by (1) CR2032 Battery	LED Powered by (1) CR2032 Battery	LED Powered by (1) CR2032 Battery
Battery Life*	Red: 68 hrs. Green: 198 hrs.	Red: 39 hrs. Green: 94 hrs.	Red: 39 hrs. Green: 94 hrs.	Red: 68 hrs. Green: 198 hrs.	Red: 68 hrs.	Red: 68 hrs.	Red: 68 hrs. Green: 198 hrs.
Tube Diameter	30mm	34mm	34mm	30mm	30mm	30mm	30mm

*Life shown is for a mid-high brightness setting - ex. 7 out of 10.


Available Reticles

Reticles not shown to scale. For a full view of reticles, please visit our website at Trijicon.com.



MOA
Center Dot

CRHX1542-C-2900033 / 2.5-15x42




MOA
Segmented Circle

CRHX624-C-2900021 / 1-6x24
CRHX624-C-2900022 / 1-6x24
CRHX828 -C-2900031 / 1-8x28




MOA
Segmented Circle Enhanced

CRHX1028-C-2900049 / 1-10x28




PowerDot™ BDC
Hunter Holds .223

CRHX624-C-2900020 / 1-6x24
CRHX624-C-2900018 / 1-6x24



PowerDot™ BDC
Hunter Holds .308

CRHX624-C-2900019 / 1-6x24
CRHX624-C-2900017 / 1-6x24



PowerDot™ MOA
Hunter Holds

CRHX1056-C-2900051 / 2.5-10x56
CRHX1542-C-2900054 / 2.5-15x42
CRHX1556-C-2900052 / 2.5-15x56
CRHX1650-C-2900053 / 4-16x50

Trijicon®
Brilliant Aiming Solutions™

Trijicon.com/CredoHX

©2026 Trijicon, Inc. | Wixom, Michigan USA | Phone: 1-800-338-0563 | info@trijicon.com
Specifications subject to change without notice. | PML4078 Rev(7) 0726