



Trijicon AccuPoint®



When you want the very best—without compromise, without fail, without second-guessing—go with a Trijicon AccuPoint® riflescope. Designed with battery-free illumination that's always on, the AccuPoint is as technologically sophisticated as it is tough.

- 1 Battery-free, "always-on" illuminated reticle
- 2 Durable construction that protects against the toughest elements
- 3 Crystal-clear lenses for brilliant sight picture and zero distortion
- 4 Second focal plane reticle for pinpoint precision
- 5 Exposed elevation adjusters for repeatable dialing

The Science of Brilliant®

At Trijicon, we are bound by a commitment to industry-leading research, design, and testing to seek innovative aiming solutions that constantly redefine "brilliant." That's why every Trijicon riflescope design is tested to the procedures below.



➤ **Alaska-to-Africa Temperature Tested**

To ensure each family of riflescopes is ready for whatever our users put them through, we perform an "Alaska-to-Africa" temperature shock test with temps from -20°F to 140°F.

➤ **Immersion Tested**

All models are immersion tested, and every riflescope is dry-nitrogen filled to eliminate internal fogging.

➤ **Solid Zero Tested**

Our riflescopes are designed to hold their zero giving you the precision you need. Every model is subjected to 5,000 consecutive rounds, confirming no reticle shift has occurred.

➤ **Shock & Vibration Tested**

All riflescope models are tested to withstand recoil and vibrational stresses without malfunction, so it can take a beating before, during, and after use.

➤ **Drop Tested**

Because we don't believe every drop should be followed by a warranty claim, we drop test each riflescope design to check for durability.

To learn more about The Science of Brilliant and Trijicon products, visit Trijicon.com/Science.

Features and Benefits

- A

Easy-Focus Eyepiece
Diopter accommodates the shooter's individual prescription.
- B

Confident Aiming in Any Light
Battery-free, illuminated reticles are “always on” using Tritium / Fiber Optic to automatically adjust to lighting conditions.
- C

Repositionable Magnification Lever*
Accommodates different shooting positions and rifle configurations.
- D

Quick & Easy Adjustments
Crisp, precise, windage / elevation adjusters require no tools. Capped or zero stop adjusters ensure no accidental shift.
- E

Purpose-Driven Design
Multiple finishes, knurling types, and adjuster styles to suit a variety of applications.
**for some models*

- F


Optimal Flexibility
Generous windage and elevation adjustment for maximum total travel.
- G

Ultra Durable for Ensured Reliability
Ruggedized design engineered to withstand extreme conditions and tested to military standards and protocols.
- H

Edge-to-Edge Clarity
Fully multi-coated broadband anti-reflective glass provides excellent light transmission, true detail and color with zero distortion.
- I

Both-Eyes-Open Shooting
Illuminated reticles provide a clear aiming point that draws the shooter's eye for fast engagement.
- J

Quick Target Acquisition
Proven reticle designs for the most discerning hunters, ensuring fast ranging and holdovers.

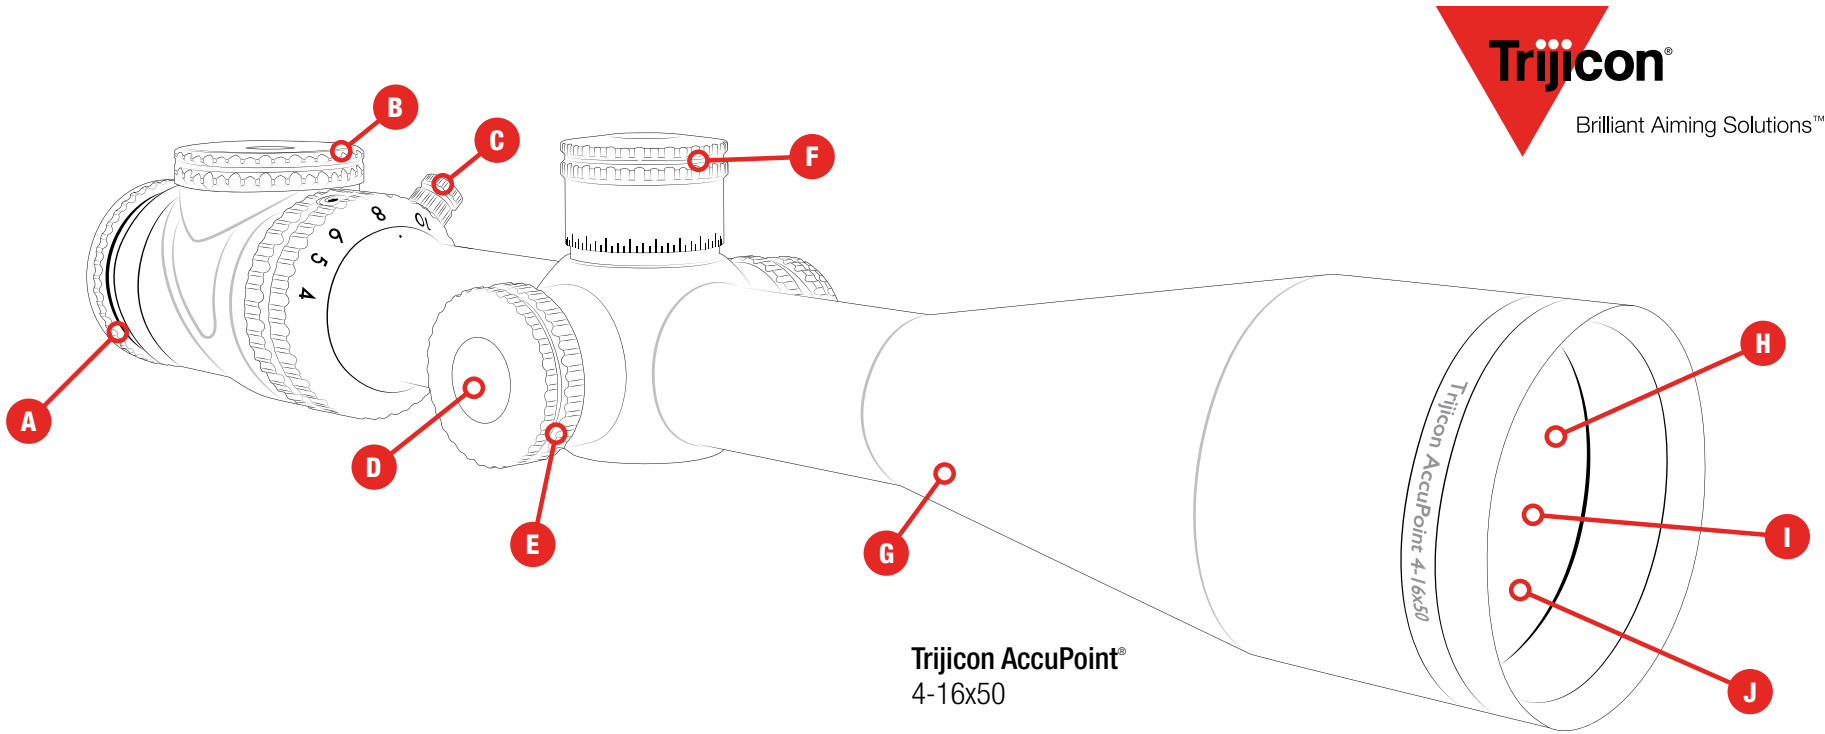


Specifications

	1-4x24 (TR24 Series)	1-6x24 (TR25 Series)	1-8x24 (TR35 Series)	2.5-10x56 (TR22 Series)	2.5-12.5x42 (TR26 Series)	3-9x40 (TR20 Series)	3-18x50 (TR34 Series)	4-16x50 (TR31 Series)	4-24x50 (TR32 Series)	5-20x50	
										(TR23 Series)	(TR33 Series)
Eye Relief	2.0 – 3.5 in. 52 – 88mm	2.8 – 5.0 in. 71 – 127mm	3.3 – 4.1 in. 83 – 104mm	2.8 – 4.6 in. 71 – 117mm	3.3 – 3.9 in. 84 – 99mm	2.2 – 3.8 in. 56 – 97mm	3.4 – 4.0 in. 87 – 101mm	3.1 – 3.8 in. 78 – 96mm	3.1 – 3.8 in. 78 – 96mm	3.8 - 4.1 in. 96 - 103mm	3.1 – 3.8 in. 78 – 96mm
Exit Pupil	0.69 – 0.20 in. 17.5 – 5.1mm	0.47 – 0.16 in. 12 – 4.1mm	0.36 – 0.12 in. 9.2 – 3.0mm	0.64 – 0.22 in. 16.3 – 5.6mm	0.42 – 0.13 in. 10.6 – 3.3mm	0.52 – 0.17 in. 13.3 – 4.4mm	0.45 – 0.11 in. 11.4 – 2.8mm	0.33 – 0.12 in. 8.5 – 3.1mm	0.33 – 0.08 in. 8.5 – 2.1mm	0.39 - 0.10 in. 10 - 2.5mm	0.3 – 0.10 in. 7.8 – 2.5mm
Field of View (@ 100 yd.) (@ 100m) (in degrees)	97.5 – 24.2 ft. 32.5 – 8.1m 18.0° – 4.6°	117.5 – 18.8 ft. 39.2 – 6.3m 21.4° – 3.6°	105.8 – 13.2 ft. 35.3 – 4.4m 20.0° – 2.5°	37.6 – 10.1 ft. 12.5 – 3.4m 7.2° – 1.9°	41.3 – 8.3 ft. 13.8 – 2.8m 7.8° – 1.6°	33.8 – 11.3 ft. 11.3 – 3.8m 6.5° – 2.2°	34.7 – 5.8 ft. 11.6 – 1.9m 6.62° – 1.11°	28.5 – 7.1 ft. 9.5 – 2.4m 5.43° – 1.36°	28.5 – 4.7 ft. 9.5 – 1.6m 5.43° – 0.91°	19.4 - 5.2 ft. 6.5 - 1.8m 3.7° - 1.0°	22.8 – 5.7 ft. 7.6 – 1.9m 4.35° – 1.09°
Focal Plane	Second	Second	Second	Second	Second	Second	Second	Second	Second	Second	
Elevation Adjuster Style	Low Capped	Low Capped	Low Capped	Low Capped	Low Capped	Low Capped	Exposed Zero Stop	Exposed Zero Stop / Low Capped	Exposed Zero Stop	Exposed	Exposed Zero Stop
Adjuster Heights Top of Tube to Top of Adjuster	0.603 in.	0.603 in.	0.720 in.	0.463 in.	0.722 in.	0.469 in.	1.012 in.	0.721 in. (C) 1.012 in. (E)	1.012 in.	1.25 in.	1.012 in.
Adjustments	1/4 MOA per click	1/4 MOA per click 0.1 MIL per click	1/4 MOA per click	1/4 MOA per click	1/4 MOA per click 0.1 MIL per click	1/4 MOA per click	1/4 MOA per click	1/4 MOA per click 0.1 MRAD per click	1/4 MOA per click	1/4 MOA per click	1/4 MOA per click 0.1 MRAD per click
Adjustment Range Total Travel	90 MOA	110 MOA / 32.6 MIL	100 MOA	60 MOA	90 MOA / 26.7 MIL	50 MOA	60 MOA	100(E)/70(C) MOA / 29.1 MRAD Elevation 70 MOA / 20.4 MRAD	100 MOA Elevation 70 MOA Windage	40 MOA	100 MOA / 29.1 MRAD Elevation 70 MOA / 20.4 MRAD Windage
Parallax Adjustment Range	N/A	N/A	N/A	N/A	10 yds. to Infinity	N/A	15 yds. to Infinity	10 yds. to Infinity	10 yds. to Infinity	40 yds. to Infinity	10 yds. to Infinity
Finish	Matte	Matte	Satin	Matte	Matte	Matte	Satin	Matte / Satin	Satin	Matte	Matte / Satin
Fiber Adjustment Style	Fiber Strip	Fiber Dial	Fiber Dial	Fiber Strip	Fiber Dial	Fiber Strip	Fiber Dial	Fiber Dial	Fiber Dial	Fiber Strip	Fiber Dial
Dimensions (L x W x H)	10.3 x 2.0 x 2.0 in.	11.0 x 2.0 x 2.0 in.	11.0 x 2.3 x 2.3 in.	13.8 x 2.6 x 2.6 in.	13.8 x 2.4 x 2.3 in.	12.4 x 1.9 x 1.9 in.	14.8 x 2.9 x 2.8 in.	14.4 x 2.9 x 2.4 in.	14.4 x 2.9 x 2.4 in.	13.6 x 3.2 x 3.2 in.	14.4 x 2.9 x 2.4 in.
Weight	14.4 oz.	19.2 oz.	19.4 oz.	20.7 oz.	22.4 oz.	13.4 oz.	27.1 oz.	25.9 - 26.8 oz.	26.8 oz.	26.9 oz.	26.8 - 26.9 oz.
Illumination Source	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium	
Tube Diameter	30mm	30mm	30mm	30mm	30mm	1 in.	30mm	30mm	30mm	30mm	

*w/out included sunshade (E) = Exposed Adjusters (C) = Capped Adjusters

Available Reticles




BAC
Triangle Post

- TR24R / 1-4x24
- TR24G / 1-4x24
- TR25-C-200090 / 1-6x24
- TR25-C-200092 / 1-6x24
- TR35-C-200184 / 1-8x24
- TR22R / 2.5-10x56
- TR22G / 2.5-10x56
- TR20R / 3-9x40
- TR20G / 3-9x40




German #4

- TR24-3G / 1-4x24




Dangerous Game BDC
Hunter Holds

- TR35-C-200183 / 1-8x24




MOA
Ranging

- TR34-C-200158 / 3-18x50
- TR31-C-200147 / 4-16x50
- TR32-C-200157 / 4-24x50
- TR33-C-200151 / 5-20x50




MRAD
Ranging

- TR33-C-200149 / 5-20x50




MIL
Dot

- TR25-C-200095 / 1-6x24
- TR22-2 / 2.5-10x56
- TR22-2G / 2.5-10x56
- TR26-C-200110 / 2.5-12.5x42
- TR20-2 / 3-9x40
- TR20-2G / 3-9x40
- TR23-2G / 5-20x50



MOA
Dot

- TR25-C-200089 / 1-6x24
- TR26-C-200104 / 2.5-12.5x42



Standard
Duplex

- TR24-C-200071 / 1-4x24
- TR25-C-200080 / 1-6x24
- TR22-1 / 2.5-10x56
- TR22-1G / 2.5-10x56
- TR26-C-200098 / 2.5-12.5x42
- TR20-1G / 3-9x40
- TR34-C-200166 / 3-18x50
- TR31-C-200146 / 4-16x50
- TR23-1G / 5-20x50
- TR33-C-200155 / 5-20x50

Reticles not shown to scale. For a full view of reticles, please visit our website at Trijicon.com.



Brilliant Aiming Solutions™

Trijicon.com/AccuPoint

©2026 Trijicon, Inc. | Wixom, Michigan USA | Phone: 1-800-338-0563 | info@trijicon.com
Specifications subject to change without notice. | PML4081 Rev(9) 0526